

---

# FMRI Connectivity Analysis in AFNI

---

Gang Chen  
SSCC/NIMH/NIH  
Nov. 12, 2009



---

## Structure of this lecture

- Overview
  - Correlation analysis
    - Simple correlation
    - Context-dependent correlation (PPI)
  - Structural equation modeling (SEM)
    - Model validation
    - Model search
  - Granger causality (GC)
    - Bivariate: exploratory - ROI search
    - Multivariate: validating – path strength among pre-selected ROIs
-

---


## Overview: fMRI connectivity analysis

- All about fMRI
    - Not for DTI
    - Some methodologies may work for MEG, EEG-ERP
  - Information we have
    - Anatomical structures
      - Exploratory: A seed region in a network, or
      - Validating: A network with all relevant regions known
    - Brain output (BOLD signal): regional time series
  - What can we say about inter-regional communications?
    - Inverse problem: make inference about intra-cerebral neural processes from extra-cerebral/vascular signal
    - Based on response similarity (and sequence)
- 

---


## Approach I: seed-based; ROI search

- Regions involved in a network are unknown
  - Bi-regional/seed vs. whole brain (**3d\***): brain volume as input
  - Mainly for ROI search
  - Popular name: functional connectivity
  - Basic, coarse, exploratory with **weak** assumptions
  - Methodologies: simple correlation, PPI, bivariate GC
  - **Weak** in interpretation: may or may not indicate directionality/causality

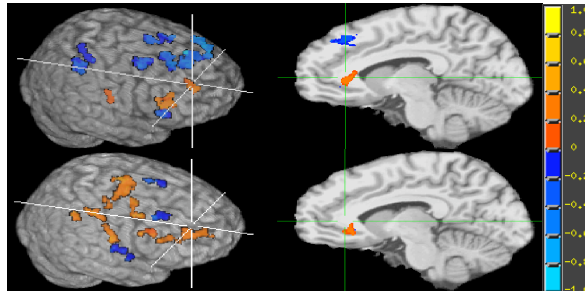


## Approach II: ROI-based

- Regions in a network are known
  - Multi-regional (**1d\***): ROI data as input
  - Model validation, connectivity strength testing
  - Popular name: effective or structural connectivity
  - Strong assumptions: specific, but with high risk
  - Methodologies: SEM, multivariate GC, DCM
  - Directionality, causality (?)



## Interpretation Trap: Correlation vs. Causation!

- Some analyses require fine time resolution we usually lack
- Path from (or correlation btw) A to (and) B doesn't necessarily mean causation
  - Bi-regional approach simply ignores the possibility of other regions involved
  - Analysis invalid if a relevant region is missing in a multi-regional model
- Robust: connectivity analysis < GLM
- Determinism in academics and in life
  - Linguistic determinism: Sapir-Whorf hypothesis

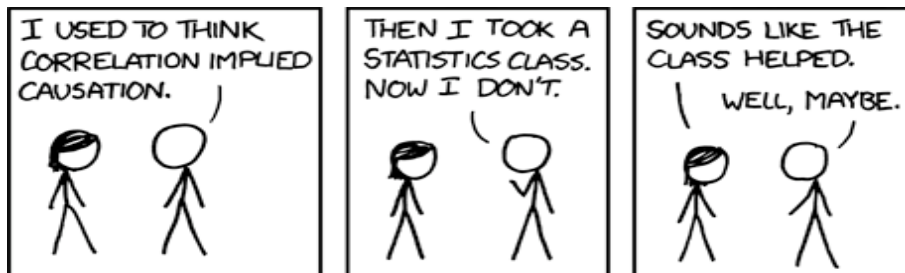

---

## Preparatory Steps

- Warp brain to standard space
    - `adwarp, @auto-tlrc, align_epi_anat.py`
  - Create ROI
    - Sphere around a peak activation voxel: `3dUndump -master ... -srad ...`
    - Activation cluster-based (biased unless from independent data): localizer
    - Anatomical database
    - Manual drawing
  - Extract ROI time series
    - Average over ROI: `3dmaskave -mask`, or `3dROIstats -mask`
    - Principal component among voxels within ROI: `3dmaskdump`, then `1dsvd`
    - Seed voxel with peak activation: `3dmaskdump -noijk -dbox`
  - Remove effects of no interest
    - `3dSynthesize` and `3dcalc`
    - `3dDetrend -polort`
    - `RETROICORR`
    - `3dBandpass` (coming soon?)
- 

---

## Simple Correlation Analysis


- Seed vs. rest of brain
  - ROI search based on response similarity
    - Looking for regions with similar signal to seed
  - **Correlation** at individual subject level
    - Usually have to control for effects of no interest: drift, head motion, physiological variables, censored time points, tasks of no interest, etc.
  - Applying to experiment types
    - Straightforward for resting state experiment
    - With tasks: correlation under specific condition(s) or resting state?
  - Program: `3dfim+` or `3dDeconvolve`
    - $r$ : not general, but **linear**, relation; slope for standardized  $Y$  and  $X$
    - $\beta$ : slope, amount of **linear** change in  $Y$  when  $X$  increases by 1 unit
  - Two interactive tools: AFNI and SUMA
-

# Simple Correlation Analysis

- Group analysis
  - Run Fisher-transformation of  $r$  to  $Z$ -score and  $t$ -test: **3dtttest**
  - Take  $\beta$  and run  $t$ -test (pseudo random-effects analysis): **3dtttest**
  - Take  $\beta$  +  $t$ -statistic and run random-effects model: **3dMEMA**
- **Caution:** don't over-interpret
  - Not proof for anatomical connectivity
  - **No golden standard procedure** and so many versions in analysis: seed region selection, covariates,  $r$  ( $Z$ )/ $\beta$ , bandpass filtering, ...
  - Just Pearson correlation (information limited if other regions present in network)
  - Be careful with group comparison (normal vs. disease): assuming within-group homogeneity, can we claim
    - No between-group difference  $\rightarrow$  same correlation/connectivity across groups?
    - Between-group difference  $\rightarrow$  different correlation/connectivity across groups?

# Context-Dependent Correlation

- Popularized name: Psycho-Physiological Interaction (PPI)
- 3 explanatory variables
  - Condition (or contrast) effect:  $C(t)$
  - Seed effect on rest of brain:  $S(t)$
  - Interaction between seed and condition (or contrast):  $I(C(t), S(t))$ 
    - **Directionality** here!
- Model for each subject
  - Original GLM:  $y = [C(t) \text{ Others}] \beta + \varepsilon(t)$
  - New model:  $y = [C(t) S(t) I(C(t), S(t)) \text{ Others}] \beta + \varepsilon(t)$
  - 2 more regressors than original model
  - **Others** NOT included in SPM
  - What we care for:  $r$  or  $\beta$  for  $I(C(t), S(t))$



---

## Context-Dependent Correlation

- How to formulate  $I(C(t), S(t))$ ?
    - Interaction occurs at neuronal, not BOLD, level
    - **Deconvolution**: derive “neuronal response” at seed based on BOLD response with **3dTfitter**
    - A difficult and an inaccurate process!
    - Deconvolution matters more for event-related than block experiments
  - Group analysis
    - Run Fisher-transformation of  $r$  to Z-score and  $t$ -test: **3dtttest**
    - Take  $\beta$  and run  $t$ -test (pseudo random-effects analysis): **3dtttest**
    - Take  $\beta$  and  $t$ -statistic and run random-effects model: **3dMEMA**
- 

---

## PPI Caution: avoid over-interpretation

- Not proof for anatomical connectivity
  - Just Pearson correlation (interpretation weakened if other regions)
  - Neuronal response is hard to decode: Deconvolution is very far from reliable, plus we have to assume a shape-fixed HRF (same shape regardless of condition or regions in the brain)
  - Doesn't say anything about interaction between seed and target on seed
  - Doesn't differentiate whether modulation is
    - Condition on neuronal connectivity from seed to target, or
    - Neuronal connectivity from seed to target on condition effect
  - Be careful with group comparison (normal vs. disease group): assuming within-group homogeneity, can we claim
    - No between-group difference => same correlation/connectivity across groups?
    - Between-group difference => different correlation/connectivity across groups?
-

## Context-Dependent Correlation: hands-on

### ■ Data

- Downloaded from <http://www.fil.ion.ucl.ac.uk/spm/data/attention/>
- Event-related attention to visual motion experiment
- 4 conditions: fixation, stationary, attention motion (att), no attention motion (natt)
- TR=3.22s, 360 time points = 90 TR's/run × 4 runs, seed ROI = V2
- All steps coded in commands.txt: `tcsh -x commands.txt` (~5 minutes)

### ■ Should effects of no interest be included in PPI model?


- Compare results between AFNI and SPM

### ■ If stimulus was presented in a resolution finer than TR

- Use **1dupsample n** to interpolate ROI time series *n* times finer before deconvolution with **3dTffiter**
- Then downsample interaction regressor back to original resolution with **1dcat** + selector '{0..\$(n)}'

## Structural Equation Modeling (SEM) or Path Analysis

- All possible regions involved in network are included
- All regions are treated equally as endogenous (dependent) variable
- Residuals (unexplained) are exogenous (independent) variables
- Analysis based on summarized data (not original ROI times series) with **model specification**, **covariance/correlation matrix**, **DF** and residual error variances (?) as input

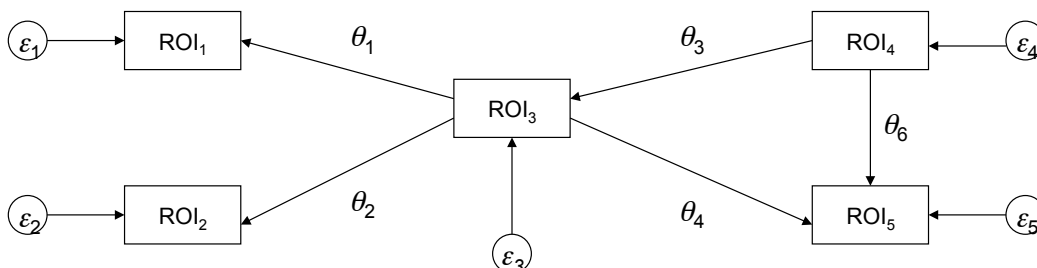

---

## SEM: theory

- Hypothetical model  $X = KX + \varepsilon$

- $X$ :  $i$ -th row  $x_i(t)$  is  $i$ -th ROI time series
- $K$ : matrix of path coefficients  $\theta$ 's whose diagonals are all 0's
- $\varepsilon$ :  $i$ -th row  $\varepsilon_i(t)$  is residual time series of  $i$ -th ROI

- Predicted (theoretical) covariance

$$\Sigma(\theta) = (I - K)^{-1} E[\varepsilon(t)\varepsilon(t)^T] [(I - K)^{-1}]^T \text{ as } X = (I - K)^{-1} \varepsilon$$

- ML discrepancy/cost/objective function btw predicted and estimated covariance ( $P$ : # of ROIs)

$$F(\theta) = \ln |\Sigma(\theta)| + \text{tr}[C \Sigma^{-1}(\theta)] - \ln |C| - P$$

- Input: model specification; covariance (correlation?) matrix  $C$ ; DF (calculating model fit statistic chi-square); residual error variances?
  - Usually we're interested in a network under resting state or specific condition
- 

---

## SEM: 1st approach - validation

- Knowing directional connectivity btw ROIs, data support model?

- Null hypothesis  $H_0$ : It's a good model

- If  $H_0$  is **not** rejected, what are the path strengths, plus fit indices?

- Analysis for whole network, path strength estimates by-product

- 2 programs

- **1dSEM** in C
    - Residual error variances as input (DF was a big concern due to limited number of time points)
    - Group level only; no CI and  $p$  value for path strength
    - Based on [Bullmore \*et al.\*, How Good is Good Enough in Path Analysis of fMRI Data? NeuroImage 11, 289-301 \(2000\)](#)
  - **1dSEMr.R** in R
    - Residual error variances not used as input
    - CI and  $p$  value for path strength
    - Individual and group level
-



---

## SEM: 2nd approach - search

- All possible ROIs known with some or all paths are uncertain
  - Resolve the uncertainty and estimate path strengths
  - Start with a minimum model (can be empty)
  - Grow (add) one path at a time that lowers cost
  - How to add a path?
    - Tree growth: branching out from previous generation
    - Forest growth: whatever lowers the cost – no inheritance
  - Program **1dSEM**: only at group level
  - Various fit indices other than cost and chi-square:
    - AIC (Akaike's information criterion)
    - RMSEA (root mean square error of approximation)
    - CFI (comparative fit index)
    - GFI (goodness fit index)
- 

---

## SEM: caution I

- **Correlation or covariance**: What's the big deal?
    - Almost **ALL** publications in fMRI use correlation as input
    - A path connecting from region A to B with strength  $\theta$ 
      - Not correlation coefficient
      - If A increases by one SD from its mean, B would be expected to increase by  $\theta$  units (or decrease if  $\theta$  is negative) of its own SD from its own mean while holding all other relevant regional connections constant.
      - With correlation as input
        - May end up with different connection and/or path sign
        - **Results are not interpretable**
        - Difficult to compare path strength across models/groups/studies,...
    - Scale ROI time series to 1 (instead of 100 as usual)
  - ROI selection very important
    - If one ROI is left out, whole analysis (and interpretation) would be invalid
-

## SEM: caution II

### ■ Validation

- It's validation, not proof, when not rejecting null hypothesis
- Different network might be equally valid, or even with lower cost: model comparison possible if nested

### ■ Search: How much faith can we put into final 'optimal' model?

- Model comparison only meaningful when nested (tree > forest?)
- Is cost everything considering noisy fMRI data? (forest > tree?)
- Fundamentally SEM is about validation, not discovery


### ■ Only model regional relationship at current moment

- $X = KX + \epsilon$
- No time delays

## SEM: hands-on

### ■ Model validation

- Data: Bullmore *et al.* (2000)
- Correlation as input
- Residual error variances as input
- **SEMscript.csh** maybe useful
- **1dSEM**: `tssh -x commands.txt`
- **1dSEMr.R**: sequential mode

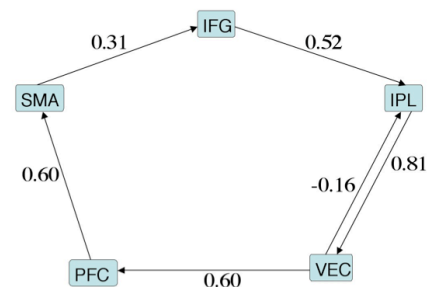

### ■ Model search

- Data courtesy: Ruben Alvarez (MAP/NIMH/NIH)
- 6 ROIs: PHC, HIP, AMG, OFC, SAC, INS
- Tree growth
- Covariance as input for **1dSEM**
- Shell script **SEMscript.csh** taking subject ROI time series and minimum model as input: `tssh -x commands.txt` (~10 minutes)

# Granger Causality: introduction

- Classical univariate autoregressive model  $AR(p)$ 
  - $y(t) = \alpha_0 + \alpha_1 y(t-1) + \dots + \alpha_p y(t-p) + \varepsilon(t) = \alpha_0 + \sum_{k=1}^p \alpha_k y(t-k) + \varepsilon(t)$ ,  $\varepsilon(t)$  white
  - Current state depends linearly on immediate past ones with a random error
  - Why called autoregressive?
    - Special multiple regression model (on past  $p$  values)
    - Dependent and independent variable are the same
  - $AR(1)$ :  $y(t) = \alpha_0 + \alpha_1 y(t-1) + \varepsilon(t)$
- What we typically deal with in GLM
  - $y = X\beta + \varepsilon$ ,  $\varepsilon \sim N(0, \sigma^2 V)$ ,  $\sigma^2$  varies spatially (across voxels)
  - Difficulty:  $V$  has some structure (e.g.,  $ARMA(1,1)$ ) and may vary spatially
  - We handle autocorrelation structure in noise  $\varepsilon$
  - Sometimes called time series regression

# Univariate time series regression in FMRI

- AR vs. Regression

	Regression	AR
Dependent + independent	different	same
Goal	accounting for $y$ with “causes” in $X$	autocorrelation
Autocorrelation	annoying	interesting
Covariates	Annoying	annoyance
Conditions/Tasks	interesting	mostly annoying
Algorithm	ML, ReML	OLS

## Rationale for Causality in FMRI

- Networks in brain should leave some signature (e.g, latency) in fine texture of BOLD signal because of dynamic interaction among ROIs
- Response to stimuli does not occur simultaneously across brain: latency
- Reverse engineering: signature may reveal network structure
- **Problem:** latency might be due to neurovascular differences!

## Start simple: bivariate AR model

- Granger causality: A Granger causes B if
  - time series at A provides **statistically significant** information about another at B at some time delays (order)
- 2 ROI time series,  $y_1(t)$  and  $y_2(t)$ , with a VAR(1) model

$$y_1(t) = \alpha_{10} + \alpha_{11}y_1(t-1) + \alpha_{12}y_2(t-1) + \varepsilon_1(t)$$


$$y_2(t) = \alpha_{20} + \alpha_{21}y_1(t-1) + \alpha_{22}y_2(t-1) + \varepsilon_2(t)$$

- Assumptions

- Linearity
- Stationarity/invariance: mean, variance, and autocovariance
- White noise, positive definite contemporaneous covariance matrix, and no serial correlation in individual residual time series

- Matrix form:  $Y(t) = \alpha + AY(t-1) + \epsilon(t)$ , where

$$Y(t) = \begin{bmatrix} y_1(t) \\ y_2(t) \end{bmatrix} \quad \alpha = \begin{bmatrix} \alpha_{10} \\ \alpha_{20} \end{bmatrix} \quad A = \begin{bmatrix} \alpha_{11} & \alpha_{12} \\ \alpha_{21} & \alpha_{22} \end{bmatrix} \quad \epsilon(t) = \begin{bmatrix} \varepsilon_1(t) \\ \varepsilon_2(t) \end{bmatrix}$$

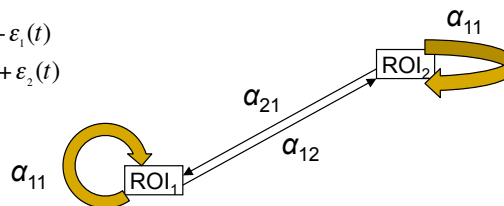

## Multivariate AR model

- $n$  ROI time series,  $y_1(t), \dots, y_n(t)$ , with VAR( $p$ ) model

$$\begin{aligned} y_1(t) &= \alpha_{10} + \sum_{k=1}^p \alpha_{11k} y_1(t-k) + \dots + \sum_{k=1}^p \alpha_{1nk} y_n(t-k) + \varepsilon_1(t) \\ &\vdots \\ y_n(t) &= \alpha_{n0} + \sum_{k=1}^p \alpha_{n1k} y_1(t-k) + \dots + \sum_{k=1}^p \alpha_{nnk} y_n(t-k) + \varepsilon_n(t) \end{aligned}$$

- Hide ROIs:  $Y(t) = \alpha + A_1 Y(t-1) + \dots + A_p Y(t-p) + \epsilon(t)$ ,

$$Y(t) = \alpha + \sum_{i=1}^p A_i Y(t-i) + \epsilon(t) \quad \alpha = \begin{bmatrix} \alpha_{10} \\ \vdots \\ \alpha_{n0} \end{bmatrix} \quad Y(t) = \begin{bmatrix} y_1(t) \\ \vdots \\ y_n(t) \end{bmatrix} \quad A_i = \begin{bmatrix} \alpha_{11i} & \dots & \alpha_{1ni} \\ \vdots & \ddots & \vdots \\ \alpha_{n1i} & \dots & \alpha_{nli} \end{bmatrix} \quad \epsilon(t) = \begin{bmatrix} \varepsilon_1(t) \\ \vdots \\ \varepsilon_n(t) \end{bmatrix}$$

## VAR: convenient forms

- Matrix form (hide ROIs)  $Y(t) = \alpha + A_1 Y(t-1) + \dots + A_p Y(t-p) + \epsilon(t)$
- Nice VAR(1) form (hide ROIs and lags):  $Z(t) = v + BZ(t-1) + u(t)$

$$Z(t) = \begin{bmatrix} Y(t) \\ Y(t-1) \\ \vdots \\ Y(t-p+1) \end{bmatrix} \quad v = \begin{bmatrix} \alpha \\ 0 \\ \vdots \\ 0 \end{bmatrix} \quad B = \begin{bmatrix} A_1 & \dots & A_{p-1} & A_p \\ I_n & \dots & 0 & 0 \\ \vdots & \ddots & \vdots & \vdots \\ 0 & \dots & I_n & 0 \end{bmatrix} \quad u(t) = \begin{bmatrix} \varepsilon(t) \\ 0 \\ \vdots \\ 0 \end{bmatrix}$$

- Even neater form (hide ROIs, lags and time):  $Y = BZ + U$

$$Y = [Y(p+1), \dots, Y(T)], \quad B = [\alpha, A_1, \dots, A_p], \quad U = [\varepsilon(p+1), \dots, \varepsilon(T)],$$

$$Z = \begin{bmatrix} 1 & 1 & \dots & 1 \\ Y(p) & Y(p+1) & \dots & Y(T-1) \\ \vdots & \vdots & \vdots & \vdots \\ Y(1) & Y(2) & \dots & Y(T-p) \end{bmatrix}$$

- Solve it with OLS:

$$\hat{B} = YZ^* = YZ'(ZZ')^{-1}$$

---

## VAR extended with covariates

- **Standard VAR( $p$ )**  $Y(t) = \alpha + A_1 Y(t-1) + \dots + A_p Y(t-p) + \epsilon(t)$
  - Covariates are all over the place!
    - Trend, tasks/conditions of no interest, head motion, time breaks (due to multiple runs), censored time points, physiological noises, etc.
  - **Extended VAR( $p$ )**  
 $Y(t) = \alpha + A_1 Y(t-1) + \dots + A_p Y(t-p) + BZ_1(t) + \dots + B_q Z_q(t) + \epsilon(t)$ ,  
where  $Z_1, \dots, Z_q$  are covariates
    - Endogenous (dependent: ROI time series)
    - Exogenous (independent: covariates) variables
    - Path strength significance:  $t$ -statistic ( $F$  in BrainVoyager)
- 

---

## Model quality check

- Order selection: 4 criteria (1<sup>st</sup> two tend to overestimate)
    - AIC: Akaike Information Criterion
    - FPE: Final Prediction Error
    - HQ: Hannan-Quinn
    - SC: Schwartz Criterion
  - Stationarity: VAR( $p$ )  $Y(t) = \alpha + A_1 Y(t-1) + \dots + A_p Y(t-p) + \epsilon(t)$ 
    - Check characteristic polynomial  $\det(I_n - A_1 z - \dots - A_p z^p) \neq 0$  for  $|z| \leq 1$
  - Residuals normality test
    - Gaussian process: Jarque-Bera test (dependent on variable order)
    - Skewness (symmetric or tilted?)
    - Kurtosis (leptokurtic or spread-out?)
-

---

## Model quality check (continued)

- Residual autocorrelation
    - Portmanteau test (asymptotic and adjusted)
    - Breusch-Godfrey LM test
    - Edgerton-Shukur  $F$  test
  - Autoregressive conditional heteroskedasticity (ARCH)
    - Time-varying volatility
  - Structural stability/stationarity detection
    - Is there any structural change in the data?
    - Based on residuals or path coefficients
- 


---

## GC applied to FMRI

- Resting state
    - Ideal situation: no cut and paste involved
    - Physiological data essential
  - Block experiments
    - Duration  $\geq 5$  seconds?
    - Extraction via cut and paste
      - Important especially when handling confounding effects
      - Tricky: where to cut especially when blocks not well-separated?
  - Event-related design
    - With rapid event-related, might not need to cut and paste (at least impractical)
    - Other tasks/conditions as confounding effects
-

## GC: caveats

- Assumptions (stationarity, linearity, Gaussian residuals, no serial correlations in residuals, etc.)
- Accurate ROI selection
- Sensitive to lags
- Interpretation of path coefficient: slope, like classical regression
- Confounding latency due to vascular effects
- **No transitive relationship:** If  $Y_3(t)$  Granger causes  $Y_2(t)$ , and  $Y_2(t)$  Granger causes  $Y_1(t)$ , it does not necessarily follow that  $Y_3(t)$  Granger causes  $Y_1(t)$ .
- Time resolution

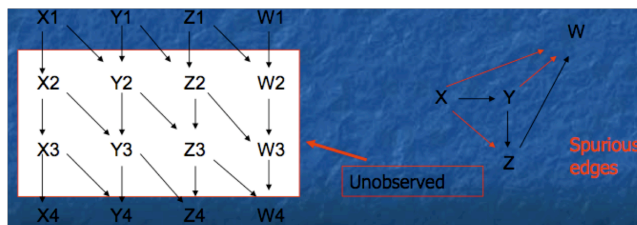

## GC in AFNI


- Exploratory: ROI searching with **3dGC**
  - Seed vs. rest of brain
  - Bivariate model
  - 3 paths: seed to target, target to seed, and self-inflicted effect
  - Group analysis with **3dMEMA** or **3dttest**
- Path strength significance testing in network: **1dGC**
  - Pre-selected ROIs
  - Multivariate model
  - Multiple comparisons issue
  - Group analysis
    - path coefficients only
    - path coefficients + standard error
    - $F$ -statistic (BrainVoyager)



## GC: hands-on


### ■ Exploratory: ROI searching with **3dGC**

- ❑ Seed: sACC
- ❑ Sequential and batch mode (~5 minutes)
- ❑ Data courtesy: Paul Hamilton (Stanford)



### ■ Path strength significance testing in network: **1dGC**

- ❑ Data courtesy: Paul Hamilton (Stanford)
- ❑ Individual subject
  - 3 pre-selected ROIs: left caudate, left thalamus, left DLPFC
  - 8 covariates: 6 head motion parameters, 2 physiological datasets
- ❑ Group analysis
  - path coefficients only
  - path coefficients + standard errors

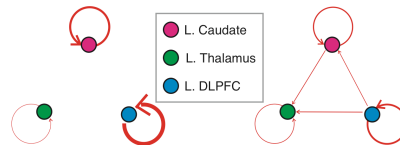

## Summary: connectivity analysis

- 2 basic categories
  - ❑ Seed based method for ROI searching
  - ❑ ROI-based for network validation
- 3 approaches
  - ❑ Correlation analysis
  - ❑ Structural equal modeling
  - ❑ Granger causality
- A lot of interpretation traps
  - ❑ Over-interpretation seems everywhere
  - ❑ I may have sounded too negative about connectivity analysis
- Causality regarding the class: Has it helped you somehow?
  - ❑ Well, maybe?

---

# Acknowledgments

- Suggestions and help
    - Daniel Glen
    - Bob Cox
    - Rick Reynolds
    - Brian Pittman
    - Ziad Saad
  - Data support
    - Paul Hamilton
    - Ruben Alvarez
-